

*Nihon Kohden Life Scope series—*  
**Support patient care with  
 unique sensing technology**

Life Scope *i*

Life Scope *A*



Life Scope *L*

- 10.4 inch TFT LCD
- 7 parameters with MULTI connector
- 5/6 waveform display

# Life Scope *L*

**Bedside Monitor**

**BSM-2351K**

**BSM-2353K**

*Clear 10.4 inch color TFT LCD  
 with innovative technology*



*Fighting Disease with Electronics*

**NIHON KOHDEN**

## Nihon Kohden Monitoring System Networ**K**

★ **LS-NET (Life Scope Networking)**

You can connect to Nihon Kohden central and bedside monitors using Ethernet and TCP/IP (LS-NET). (An optional QI-101P network card is required.)

★ **HL7 gateway**

You can connect to an HIS (Hospital Information System) and LS-NET using an HL7 gateway. (An optional QP-982PK HL7 gateway software is required.)

★ **Wireless Networking**



By attaching an optional ZS-900PK transmitter (optional holder DI-230P required) to the monitor, you can transmit waveforms and parameter data to a Nihon Kohden telemetry central monitor or multi-patient receiver.

**Major options**

For full list of options and consumables, see the Technical Data separately available

**SpO<sub>2</sub> probe, BluPRO®**

**Reusable type (washable)**



**Recorder module, WS-231P (3-channel)**



**P225F** finger



**P225G** multi-site



**P311C** finger

**Disposable type**




**P203A** adult finger  
**P203B** child finger



**P203C** neonate instep  
**P203D** infant finger or toe

**CO<sub>2</sub> sensor (mainstream)**

**cap-ONE**  
 ORAL NASAL EXPIRATION



**World's first mainstream CO<sub>2</sub> sensor for both intubated / non-intubated patients**



**P907** CO<sub>2</sub> sensor kit

**V923** Disposable naso-oral adapter, for oxygen cannula adjustment, 30 pcs

**R804** Airway adapter for intubated patients, 30 pcs



**P903** CO<sub>2</sub> sensor kit

**R801** Airway adapter, 50 pcs

This brochure may be revised or replaced by Nihon Kohden at any time without notice.

**NIHON KOHDEN**

NIHON KOHDEN CORPORATION  
 1-31-4 Nishiochiai, Shinjuku-ku, Tokyo 161-8560, Japan  
 Phone +81 (3) 5996-8036 Fax +81 (3) 5996-8100  
 www.nihonkohden.com

5114 CAT.No.55-065A 07.03.SZ.E.


# 7 parameters and 6 or 5 waveforms on a 10.4 inch TFT color LCD touch screen

## High performance and site-oriented—satisfies your needs

### ★ 7 parameters with MULTI connector

ECG, impedance respiration, SpO<sub>2</sub>, NIBP, temperature, IBP (BSM-2353K) and MULTI connector parameters (IBP, mainstream CO<sub>2</sub>, or thermistor respiration)

When you plug the sensor cable into a MULTI connector, it automatically detects the type of parameter and starts measuring.

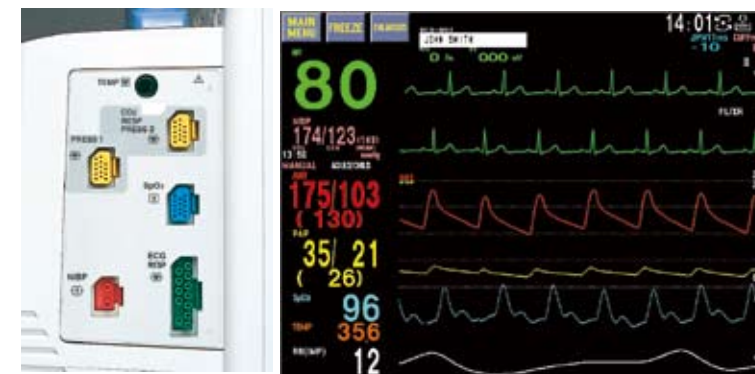

### ★ Crisp 5 or 6 waveform display

6 (BSM-2353K) or 5 (BSM-2351K) waveforms on a 10.4 inch TFT LCD (800 × 600 dots). Dual-lead ECG, respiration, pulse (SpO<sub>2</sub>), IBP (BSM-2353K) and either IBP or CO<sub>2</sub> waveforms can be displayed.

## Innovative technology

### ★ PWTT triggered NIBP measurement


PWTT triggered NIBP measurement increases the chance to detect sudden change in blood pressure.



PWTT trend

### PWTT

Blood pressure	PWTT
UP ↗	Shorter ↔
DOWN ↘	Longer ↔




PWTT (Pulse Wave Transit Time) has a correlation to blood pressure in most cases. PWTT can be calculated from ECG and SpO<sub>2</sub> non-invasively. During periodic NIBP measurement, if PWTT exceeds a threshold it triggers NIBP measurement. The blood pressure measuring technology in Life Scope i uses Nihon Kohden's patented PWTT technology (US patent no. 5564427, other patents pending).

### NICU OCRG screen

An OCRG (Oxygen Cardiorespirogram) display for NICU monitoring displays respiration wave, real-time heart rate, and SpO<sub>2</sub> trendgraph simultaneously.

Impedance lead selection helps in difficult neonatal respiration measurement.

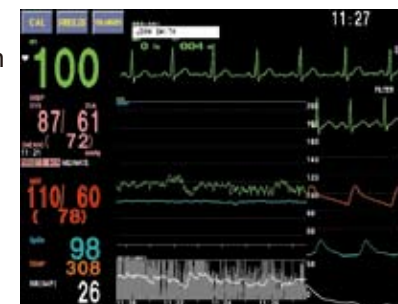

### OR Optional multi gas unit

With optional AG-920R multi gas unit, CO<sub>2</sub>, O<sub>2</sub>, N<sub>2</sub>O, anesthetic agents (Halothane, Isoflurane, Enflurane, Sevoflurane, Desflurane) can be measured. The monitor automatically distinguishes the agent type during measurement.



multigas unit, AG-920RA/RK

### ICU/CCU Multi-template arrhythmia analysis

16 arrhythmia episodes for 8 seconds can be stored using an editable multi-template arrhythmia analysis method which provides more reliable arrhythmia information.



### ICU/CCU Review function


#### ★ Alarm history

The alarm history is created when any alarm occurs. Up to 200 alarms can be saved and displayed on the alarm history window.



#### ★ Trend/vital signs list

Up to 24 hours of trendgraphs of all parameters, and 120 sets of vital signs list data and 120 sets of NIBP list data can be stored and reviewed.

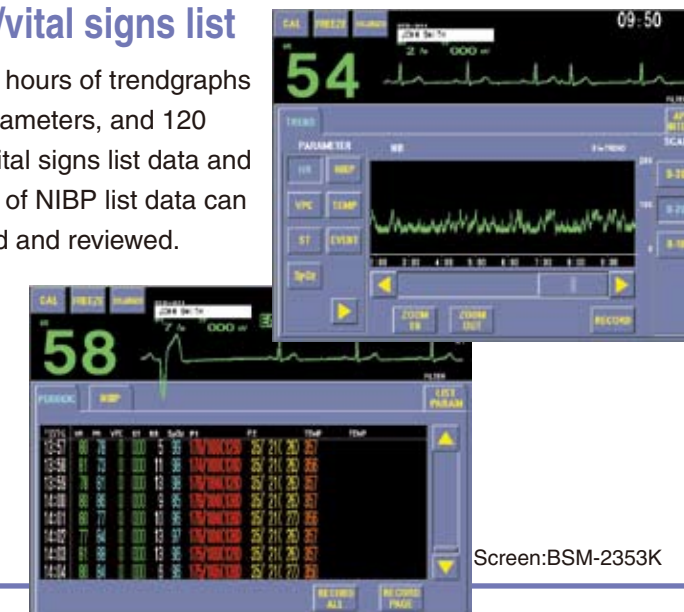

Screen:BSM-2353K

## User-friendly design and operation

### ★ Touch screen

A touch screen allows easy and intuitive operation. Just touch the place on the screen you want to see or change. A Home key takes you to the main menu from any screen.

You can view 30-minute short trend with real time waveform, and change the length of the short trend display with your finger.



### ★ Interbed

You can view information of other LifeScope series bedside monitors in an LS-NET Nihon Kohden monitor network. The interbed screen displays one waveform, numeric data and alarm of each bed.



Screen:BSM-2353K

### ★ 3-hour battery operation for transport

Provides continuous monitoring during transportation. The battery is automatically charged during AC operation. (Battery, X062, option)

### ★ Customized keys

You can set three function keys to call up your commonly used preset screens with one key stroke.



### ★ Enlarged numeric display

An enlarged numeric display lets you see the patient condition from a distance.



Screen:BSM-2353K

### ★ Free-writing of patient name

You can directly write the patient name on screen with your finger or an optional touch pen. Any characters and figures can be displayed. (not available on the network)



### ★ 3 alarm level indicator

A wide-viewing alarm indicator at the top of the monitor can be seen clearly from a distance. It lights in red or yellow to indicate the severity of the alarm and in green with QRS synchronization.

